

# Self-operated Regulators Series 2371



## Pressure Reducing Valve for food processing and pharmaceutical industries

### Type 2371-11

#### Application

Pressure reducing valve for set points **0.3 to 6 bar** (5 to 90 psi) · **K<sub>vs</sub> 2 to 5.2** (C<sub>v</sub> 2.5 to 6) · **DN 15 to DN 50** (NPS ½ to 2) · For liquids and gases from **-10 to +130 °C** (14 to 266 °F) · Max. operating pressure (inlet pressure) **10 bar** (150 psi)

The valve closes as the outlet pressure **rises**



#### Special features

- Proportional regulator for use in the food processing and pharmaceutical industries
- Wetted inside surfaces with a smooth or polished finish
- Stainless steel 1.4404 (316L)
- FDA-approved materials
- Angle-style valve body

The regulator has a body free of cavities. It can optionally be fitted with a stem locking facility to keep the plug open during CIP (Cleaning in Place) or SIP (Sterilization in Place).

A test bore allows the diaphragm to be monitored for leakage.

#### Version

Pressure reducing valve with a diaphragm for controlling the outlet pressure to the set point adjustable over a spring.

Angle valve · Version in full-mold cast body · DN 15 to DN 50 (NPS ½ to 2)

Standard version with plug with metal sealing or optionally special plug with soft sealing.

Maximum pressure 10 bar (150 psi) · Clamp to attach actuator housing

#### Connections

Standard connections:

- Clamp connections according to ISO 2852
- Threaded connections according to DIN 11887

Special connections:

- Flanges according to DIN EN 1092-1, ASME B16.5
- Threaded connections according to SMS, IDF
- Clamp connections according to DIN 32676, BS 4825

#### Special versions

- Body made of 1.4435 · Other materials on request
- Body with DN 65 connections
- Body with two outlet ports



Fig. 1 · Type 2371-11 Pressure Reducing Valve

### Principle of operation (see Fig. 2)

The process medium flows through the valve body (1) in the direction indicated by the arrow. The position of the valve plug (3) determines the flow rate across the cross-sectional area released between the plug and the valve seat (2).

To control the pressure, the operating diaphragm (4) is pretensioned by the positioning springs (7) and the set point screw (6). The valve opens when the downstream pressure  $p_2$  falls below the adjusted set point. The resulting output pressure  $p_2$  depends on the flow rate.

The set point is adjusted by an Allen key (SW 8), which is inserted through the adjustment opening (6.1) on top of the housing to adjust the set point screw (6). The blanking plug must first be removed.

Turning the set point screw clockwise causes the spring plate (7.1) to move upwards and increases the spring force and the set point. Turning the set point screw counterclockwise relieves the spring tension, reducing the set point.

If necessary, the set point screw (6) can be secured by locking screw (12) in the upper plug section (5) to prevent the set point screw from loosening due to vibrations which would change the set point.

The test bore (11) in the body indicates when the operating diaphragm leaks or a diaphragm rupture.

### Stem locking (Fig. 3)

The version with stem locking is designed to keep the plug in the open position. This allows safe and effective cleaning (CIP or SIP) while the valve is open.

To lock the valve stem, turn the pin (13) in place of the blanking plug (6.1) to the open position. The end of the pin is located on the head of the set point screw (6) and upper plug section plug (5). A mechanical stop (15) prevents it from being screwed in any further, protecting the diaphragm from overstretching or rupturing. The position is secured by the lock nut (14).

When the groove of the pin is completely covered, the stem locking is active, whereas a visible groove means it is disengaged.

### Installation

The regulator has an angle-style valve body.

Install the valve into the pipeline, observing the following points:

- The valve must be installed with actuator housing facing upwards and the outlet port in the horizontal position.
- The medium must flow through the valve in the direction indicated by the arrow on the valve body (inlet at the bottom and outlet at the side).

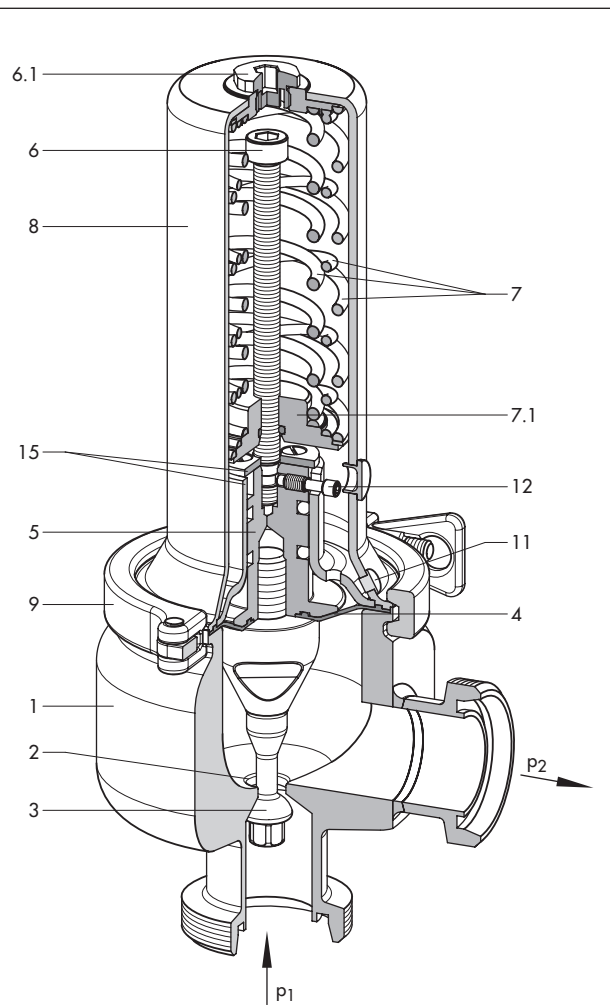


Fig. 2 · Sectional drawing for Type 2371-11

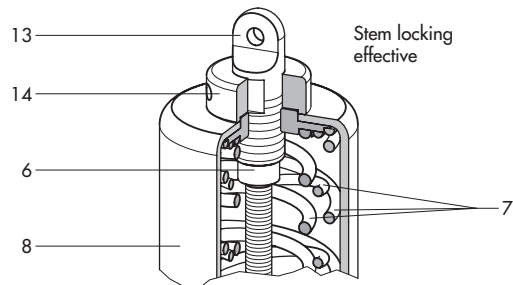


Fig. 3 · Sectional drawing of the stem locking

- |     |                                       |    |                  |
|-----|---------------------------------------|----|------------------|
| 1   | Valve body                            | 8  | Actuator housing |
| 2   | Seat                                  | 9  | Clamp fitting    |
| 3   | Plug                                  | 11 | Test bore        |
| 4   | Operating diaphragm                   | 12 | Locking screw    |
| 5   | Upper plug section                    | 13 | Pin              |
| 6   | Set point screw                       | 14 | Lock nut         |
| 6.1 | Adjustment opening with blanking plug | 15 | Mechanical stop  |
| 7   | Positioning springs                   |    |                  |
| 7.1 | Spring plate                          |    |                  |

**Table 1 · Technical data** · All pressures specified as gauge pressures

Type 2371-11 Pressure Reducing Valve		DN					NPS						
Nominal size		15	20	25	32	40	50	½	¾	1	1½	2	
K <sub>V5</sub> <sup>1)</sup> m <sup>3</sup> /h		2	3	3.5	4	4.5	5.2	-					
C <sub>V</sub> <sup>1)</sup> US gal/min		-					2.5	3.5	4	5.3	6		
Set point ranges		0.3 to 1.2 bar · 1 to 3 bar · 2.5 to 4.5 bar 4 to 6 bar					5 to 18 psi · 15 to 45 psi · 35 to 65 psi 60 to 90 psi						
Maximum pressure		10 bar					150 psi						
Max. perm. temperature range	Operating temp. range	-10 to +130 °C					14 °F to 266 °F						
	Sterilizing temperature	150 °C up to 30 minutes					300 °F up to 30 minutes						
Leakage rate	Metal sealing	≤ 0.05 % of K <sub>V5</sub> or C <sub>V</sub>											
	Soft sealing	≤ 0.02 % of K <sub>V5</sub> or C <sub>V</sub>											
Peak-to-valley height and surface treatment	External	R <sub>a</sub> ≤ 1.6 μm, glass bead blasted <sup>2)</sup> · R <sub>a</sub> ≤ 0.6 μm, polished											
	Internal	R <sub>a</sub> ≤ 0.8 μm, smooth finish <sup>2)</sup> · R <sub>a</sub> ≤ 0.6 μm, polished · R <sub>a</sub> ≤ 0.4 μm, satin finish R <sub>a</sub> ≤ 0.4 μm, mirror finish											

<sup>1)</sup> Other K<sub>V5</sub>/C<sub>V</sub> on request · <sup>2)</sup> Standard version


**Table 2 · Materials** · Material number acc. to DIN EN

Version		DIN	ANSI
Body		1.4404	316L
Plug	With metal sealing	1.4404	316L
	Seat ring for soft sealing	PEEK	
Diaphragm		EPDM and PTFE	
Cap		1.4404	316L
Springs		1.4310	301

**Table 3 · Connections, max. operating pressure (inlet press.) and temperature ranges** · See pressure-temperature diagram **1** **2**

Connections	Standard	Nominal size mm · inch	Pressure-temperature values	
			Max. inlet pressure	Medium temperature range
Threaded connections	DIN 11887 Type A	DN 15 to 50	10 bar	-10 to 100 °C <b>1</b>
	SMS 1146	DN 25 to 50	6 bar	-10 to 100 °C <b>1</b>
	ISO 2853 (IDF)	NPS 1 to 2	150 psi	14 to 212 °F <b>2</b>
Clamp connections	DIN 32676	DN 15 to 50	10 bar	-10 to 100 °C <b>1</b>
	ISO 2852	DN 25 to 50	10 bar	-10 to 100 °C <b>1</b>
	BS 4825	NPS 1, 1½, 2	150 psi	14 to 212 °F <b>2</b>
Flanges with smooth raised face R <sub>a</sub> ≤ 0.8 μm	DIN EN 1092-1 Form B2 PN 10	DN 15 to 50	10 bar	-10 to 100 °C <b>1</b>
	PN 6	DN 15 to 50	6 bar	-10 to 100 °C <b>1</b>
	ASME B 16.5 Form RF (CL 150)	NPS ½ to 2	150 psi	14 to 212 °F <b>2</b>

**1** Pressure-temperature diagram for materials according to DIN EN · Temperature range extended  
Material: 1.4404

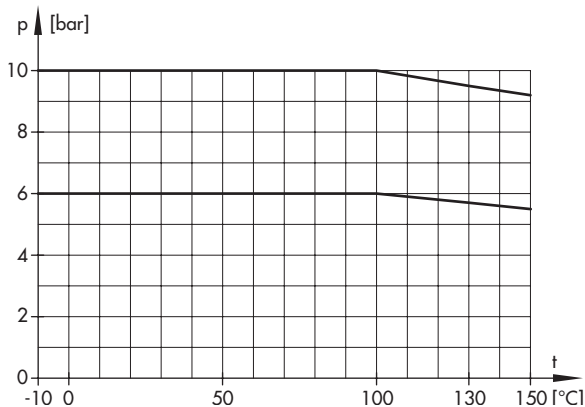

**2** Pressure-temperature diagram for ANSI materials  
Temperature range extended  
Material: 316L

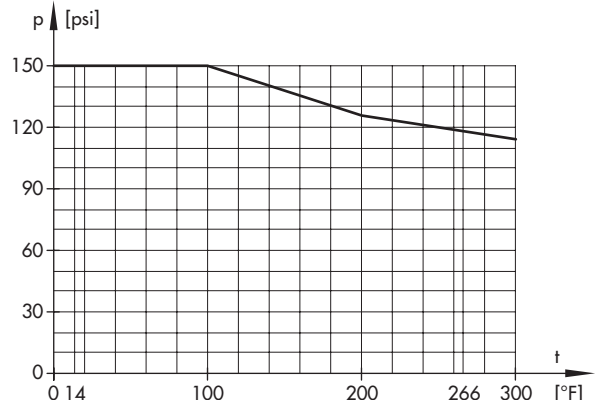


Fig. 4 · Pressure-temperature diagrams

## Dimensions

### Dimensions in mm and weights in kg

Valve	DN NPS	15 ½	20 ¾	25 1	32	40 1½	50 2
Clamp connections acc. to DIN 32676	L1	55	55	60	60	65	70
	L2	90	90	90	90	90	90
	∅d1	16	20	26	32	38	50
	∅C3	34	34	50.5	50.5	50.5	64
Clamp connections acc. to BS 4825	L1	-		60	-		65 70
	L2	-		90	-		90 90
	∅d1	-		22.2	-		34.9 47.6
	∅C3	-		50.5	-		50.5 64
Clamp connections acc. to ISO 2852	L1	-		60	60	65	70
	L2	-		90	90	90	90
	∅d1	-		22.6	31.3	35.6	48.6
	∅C3	-		50.5	50.5	50.5	64
Threaded connections acc. to DIN 11887	L1	55	55	60	60	65	70
	L2	90	90	90	90	90	90
	∅d1	16	20	26	32	38	50
	∅C1	34x 1/8"	44x 1/6"	52x 1/6"	58x 1/6"	65x 1/6"	78x 1/6"
Threaded connections ... acc. to SMS 1146 acc. to IDF	L1	-		60	60	65	70
	L2	-		90	90	90	90
	∅d1	-		22.6	29.6 <sup>1)</sup>	35.6	48.6
	∅C2	-		40x 1/6"	48x 1/6"	60x 1/6"	70x 1/6"
Flanges ... acc. to DIN EN 1092-1	L1	90	95	100	105	115	125
	L2	90	95	100	105	115	125
ASME B16.5	∅d1	16	20	26	32	38	50
Common dimensions	A	95	95	95	95	95	95
	H1	255	255	255	280	280	280
	H3	≥ 200					
	H4	50					
Weight with clamp connections	Approx. 7 kg			Approx. 10 kg			

<sup>1)</sup> Acc. to ISO 2853 (IDF): 31.3 mm

Fig. 5 · Dimensions

### Ordering text

#### Pressure Reducing Valve Type 2371-11

DN ...


Set point range: 0.3 to 1.2 bar/1 to 3 bar/2.5 to 4.5 bar/4 to 6 bar · 5 to 18 psi, 15 to 45 psi, 35 to 65 psi, 60 to 90 psi

Type of connections: Threaded connection acc. to .../clamp connection acc. to .../flange connection acc. to ...

Plug with metal sealing/soft sealing

Surface roughness internal ..., external ...

Stem locking: Without/with

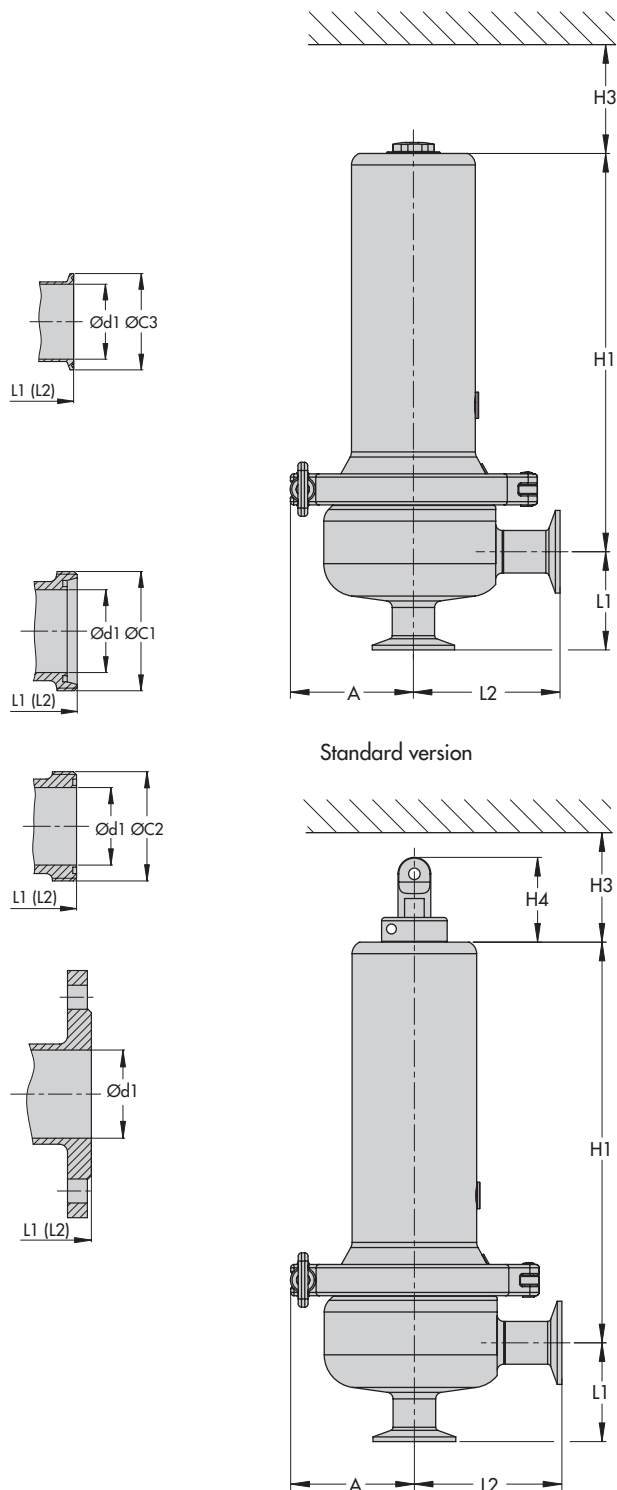

Type 2371-11 with stem locking

Diagrams show Type 2371-11 with clamp connections

Specifications subject to change without notice.



SAMSON AG · MESS- UND REGELTECHNIK  
Weismüllerstraße 3 · 60314 Frankfurt am Main · Germany  
Phone: + 49 69 4009-0 · Fax: +49 69 4009-1507  
Internet: <http://www.samson.de>

T 2640 EN